

FETDETERRA


	Product	Tapialblock® 20/100/15
	Dimensions	20 x 100 x 15 cm
	Weight	60 kg
	Wall thickness	20cm

Appearance and surface	Rugged surface texture, with sporadic appearance of coarse aggregate as finishing texture
Finished	Sighted surface
Placement	Exterior and interior
Colour	Earth

Density	2.000 Kg/m ³
Compression resistance	5,0 N/mm ²
Cycle resistance moistening / drying	Suitable
Resistance to erosion	Suitable
Water absorption test by capillarity	4,5 %
Oxidable organic material content	0,06 %
Impact resistance	> 24,6 Joules
Coefficient of thermal conductivity	0,778 W/m·K
Specific heat	2,05 MJ/m ³ K
Fire resistance	A1
Reduction index. R _Δ	56 dBA

The blocks are presented in indivisible pallets.
It should be stored in a protected and dry place. Do not stack pallets.

Pcs/pallet	12 blocks/ pallet
Dimension/pallet	120 x 120 cm
Weight/pallet	720 kg/pallet
Area	6,7 blocks/m ²

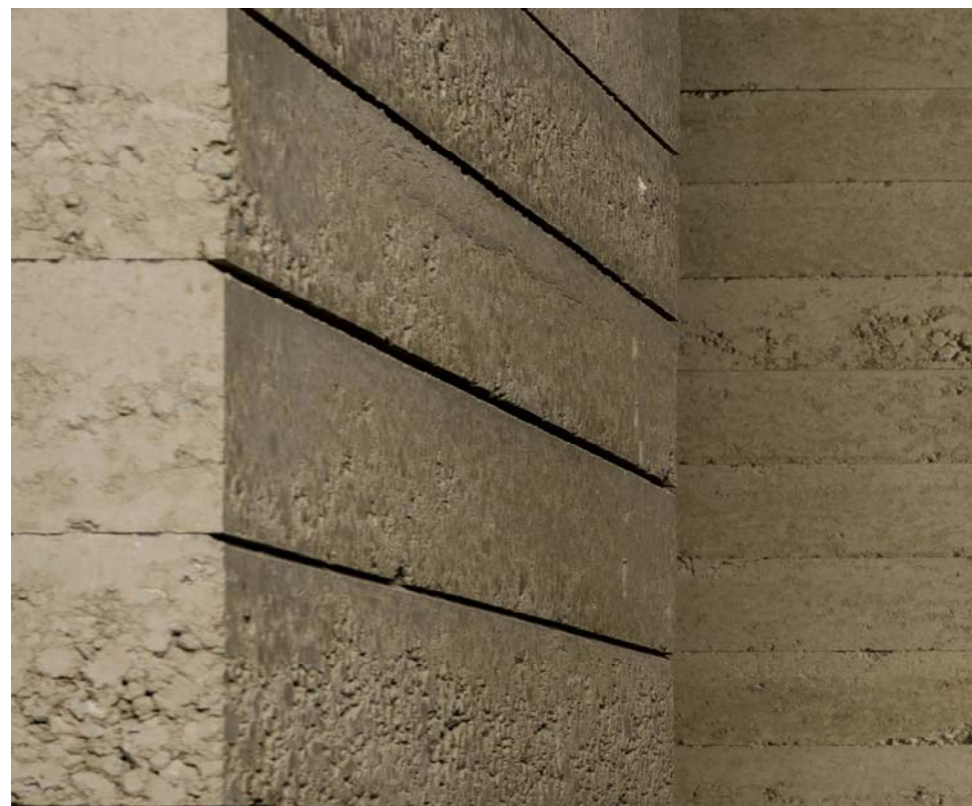

DATA SHEET